

Generic Input		Easytork internal use only	
Valve Brand	Marwin	Valve Brand Truncate	MW
Series	3L/T 2100F-F	Series Truncate	2100FF
Input: 1 = mm / 2 = in	2		
Safety Factor	25%		



Actuator Design Year

16

Valve Input

Valve Torque				Section Only For Non Direct Mount ("D.M"), Otherwise Leave Blank						Valve Dimension									
Direct Mount Check				Bracket Check		Extended Shaft Check		Buyer Preference		Valve Info		Valve Flange		Valve Dimension		Valve Stem Shape and Dimension			
Published valve torque	Incl. safety factor	Any obstruction over flange?		Possible obstruction for std. Easytork bracket?	Out. dia. of obstruction over flange surface	Are bolts for packing gland close to valve stem height?	If bolts interfere with valve stem, what is inside dia. between bolts?	If w/ bracket: How much valve stem capture?	If known, capturable valve stem height	In ISO (i.e. F05)	Flange to top of valve stem	Stem Shape	Valve stem dimension in in or mm	V	V1	V2	Insert orientation when valve is CLOSED. If Sq 1=diamond / 2=square If DD or B+K 1=in line / 2=not in line		
Valve Size	in-lb	in-lb	1=Yes / 0=No	1=Yes / 0=No	in/mm	1=Yes / 0=No	in/mm	in/mm	in/mm	in/mm	in/mm	in/mm	Key	in / mm	in/mm	in/mm	in/mm	1 = Diamond or in line / 2=Square or not in line	
1/2"	147	184	No								F03	0.43	1	in	0.350	0.350		1	
3/4"	177	221	No								F04	0.55	1	in	0.430	0.430		1	
1"	288	360	No								F04	0.55	1	in	0.430	0.430		1	
1 1/4"	398	498	No								F05	0.71	1	in	0.550	0.550		1	
1 1/2"	636	795	No								F07	0.71	1	in	0.550	0.550		1	
2"	826	1,033	No								F07	0.91	1	in	0.670	0.670		1	
2 1/2"	1,550	1,938	No								F10	0.98	1	in	0.870	0.870		1	
3"	1,698	2,123	No								F10	0.98	1	in	0.870	0.870		1	
4"	2,730	3,413	No					0.900		0.98	F10	0.98	1	in	0.870	0.870		1	
6"	5,603	7,004	Yes	Yes				2.000		2.40	F12	2.40	1	in	1.420	1.420		1	
		0																	
		0																	
		0																	
		0																	
		0																	
		0																	
		0																	
		0																	

Notes:

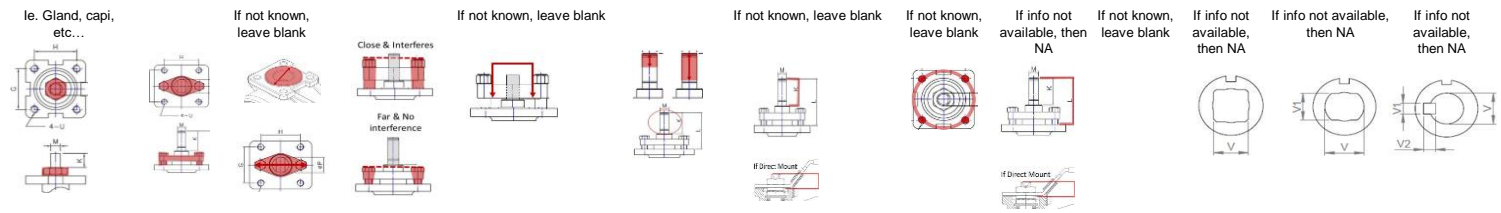

**Disclaimer: Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.**

Valve Size	Required Actuator Range	Actuator Torque (Actual torque, no additional safety factor included)				Individual Part Order Code* (If ordered with the below order codes, Easytork will ship each part as standalone)				2017 List Price				
		DA @ 60PSI	DA @ 80PSI	FS @ 60PSI	FS @ 80PSI	Actuator	Insert	Extended Shaft	Bracket	Actuator +	Insert +	Extended Shaft +	Bracket or Plate +	= Total Package: Actuator and hardware for mounting to valve
1/2"	EVA-0309	146	195	95	127	C-A-1-11-1-111								
	EVA-0411	288	384	187	250	C-A-2-11-1-111	D-211-0.350x0.350in							
3/4"	EVA-0411	288	384	187	250	C-A-2-11-1-111								
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-311-0.430x0.430in							
1"	EVA-0411	288	384	187	250	C-A-2-11-1-111								
	EVA-0514	572	763	372	496	C-A-3-11-1-111	D-311-0.430x0.430in							
1 1/4"	EVA-0514	572	763	372	496	C-A-3-11-1-111								
	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-411-0.550x0.550in							
1 1/2"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111	D-411-0.550x0.550in							
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-511-0.550x0.550in							
2"	EVA-0717	1,144	1,526	744	992	C-A-4-11-1-111								
	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111	D-511-0.670x0.670in							
2 1/2"	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111								
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-611-0.870x0.870in							
3"	EVA-1022	2,289	3,051	1,488	1,983	C-A-5-11-1-111								
	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-611-0.870x0.870in							
4"	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-611-0.870x0.870in							
	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111	D-711-0.870x0.870in	K-AS-7-1-1-2	B-2-F10L-F12L-2.08in					
6"	EVA-1227	4,577	6,103	2,975	3,967	C-A-6-11-1-111	D-611-1.420x1.420in	K-AS-6-1-1-2	#VALUE!					
	EVA-1436	9,154	12,205	5,950	7,933	C-A-7-11-1-111		K-AS-7-1-1-2	#VALUE!					

**Complete Actuator to Valve Order Code\***

Easytork will ship the actuator, insert, extended shaft, and bracket unassembled in one SKU box.

Refer to [Assembly & Labor tab](#) if buyer wants Easytork to assemble items together.

MW.2100FF.1/2".0309.16
MW.2100FF.1/2".0411.16
MW.2100FF.3/4".0411.16
MW.2100FF.3/4".0514.16
MW.2100FF.1".0411.16
MW.2100FF.1".0514.16
MW.2100FF.1 1/4".0514.16
MW.2100FF.1 1/4".0717.16
MW.2100FF.1 1/2".0717.16
MW.2100FF.1 1/2".1022.16
MW.2100FF.2".0717.16
MW.2100FF.2".1022.16
MW.2100FF.2 1/2".1022.16
MW.2100FF.2 1/2".1227.16
MW.2100FF.3".1022.16
MW.2100FF.3".1227.16
MW.2100FF.4".1227.16
MW.2100FF.4".1436.16
MW.2100FF.6".1227.16
MW.2100FF.6".1436.16

**Disclaimer:** Based on information available from valve manufacturer. All dimensions to be verified by customer prior to purchase confirmation.

**Note\*:** Only for actuator and hardware required for mounting to valve. Order auxiliary add-ons (e.g., solenoid valve, lockout & PST, limit switch, chemical resistant adder, etc.) separately. If buyer requires assembly of auxiliary add-ons and/or valve, labor will be charged separately.